
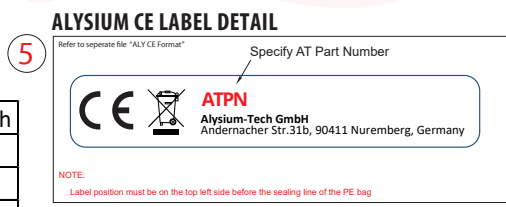


(Slot for Colored Ring
See Optional Accessories Table)



CXP Variants

CXP Speed	Bit Rate	Assembly Max Length
CXP-3	3.125 Gbit/s	30 Meter
CXP-6	6.25 Gbit/s	30 Meter
CXP-12	12.5 Gbit/s	20 Meter

Above chart represent typical practical cable length. Anything beyond will be classified as "Fit for used". Stable operation in some applications cannot be guaranteed.

UNIT : mm
UNLESS OTHERWISE SPECIFIED
ASSY LENGTH TOLERANCE

 < 150mm = ±10
 ≥ 150mm and < 250mm = ±15
 ≥ 250mm and < 500mm = ±20
 ≥ 500mm and < 1000mm = ±30
 ≥ 1000mm and < 5000mm = ±50
 5000mm and above = ±100

Optional Accessories (Bracket + Colored Ring)

ATPN
*1. CXP Bracket Kit
(* (For further details, please contact our sales representative))

This document is the property of Alysium-Tech. It must not be copied or otherwise disclosed without prior written consent

RoHS COMPLIANT

BILL OF MATERIALS

Item	Description
1	Micro BNC Male Moulded (OD4.04) V2<BLK>
2	A36-2065, 12GHz UHD Video Coaxial Cable 75ohm 23AWG PVC [OD=4.04mm] <BLK>
3	Heat sealed PE Bag
4	Cable Label
5	Label on Bag (ALY CE)

